




Cat.5e F/UTP PE AWG24/1

LAN cable with 4 pairs, outdoor category 5, with screen and messenger wire



Standards: ISO/IEC 11801, IEC 61156-5
EN 50173-1, EN 50288-6-1; EIA/TIA 568-B

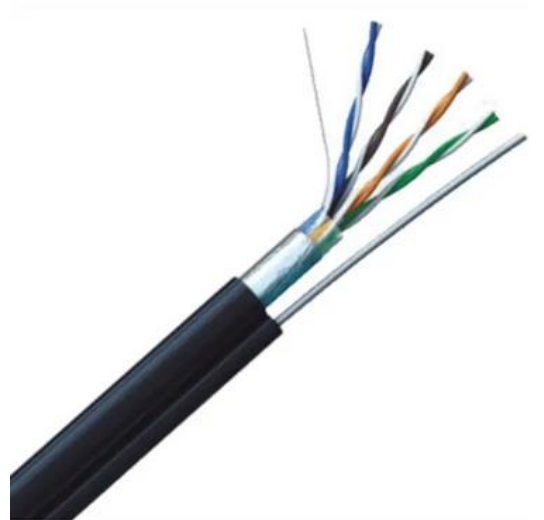

Ambient installation T°
C range
0 + 50 °C



Operating temp.
-40 + 75 °C



Storage temperature
range
-20 + 70 °C



Flame retardant
IEC 60332-1



Smoke density

The 4-pair high performance cable with 8 copper wires AWG24 is suitable for connecting sockets, patch fields and modules, also with IDC technology, for laying in buildings, in ducts and flush-mounted. Category 5e supports a frequency range of up to 100 MHz and is designed for transmission speeds of up to 1 gigabit per second (Gigabit Ethernet). The cable is suitable for operating PoE and PoE+ over a channel length of up to 100 m. It is also suitable for following application: Telephony, Ethernet, Fast Ethernet and Gigabit Ethernet, 10BaseT, 1000BaseT, 1GBaseT.. Its PE sheath makes it ideal for direct burial, underground ducts and outdoor cable ducts that require long service life and consistent signal quality.

Solid Shielded F/UTP CAT5e Network Cable. Its solid copper conductors and foil screen shielding ensure minimal interference and reduced crosstalk. Suitable for direct burial or aerial use, this black cable is rated to transmit data at up to 1000 Mbps and operates at temperatures from -40°C to +75°C. With its ETL & c(ETL)us rating and RoHS compliance, this network cable guarantees both safety and quality.

Temperature limit conditions:

- Ambient installation temperature, range: from 0°C to +50°C
- Operating temperature, range: from -40 °C to +75°C

Mechanical properties:

Minimum internal bending radius:

(D = cable outer diameter)

- Installed (no load) 4xD
- during installation (under load): 8xD
- packaging: 305m in box, 500m on wooden reel

Flame resistance:

- the cable is self-extinguishing according to IEC 60332-1 ; EN 50339
- LSHF version additionally:
 - halogen-free according to IEC 60754-1
 - non-corrosive combustion gases according to IEC 60754-2
 - minimal smoke emission according to IEC 61034-2

Cable construction

Conductor category class:	1 = solid conductor
Conductor material	Pure copper
AWG size	24/1
Insulation material	Polyethylene (HDPE)
Nominal diameter through insulation	0.9 mm
Twisting:	2 cores in a pair
Cable lay up:	4 pairs to the core
Screen	Aluminium Polyester Tape
Sheath:	LDPE
Outer diameter:	5.4-5.7 mm
Sheath color:	Black(RAL 9005)
Messenger wire	Zn wire f 1.15-1.2 mm O.Diameter f 2.8 mm Color Black (RAL9005)

Conductor color marking:

- 1st suit: blue/white with blue line
- 2nd suit: orange/white with orange line
- 3rd suit: green/white with green line
- 4th suit: brown/white with brown line

Electrical characteristics at 20°C ± 5°C

Characteristic impedance at 100 MHz	(Ω) 100 ± 5
Resistance unbalance , max.	% 2,2
Loop resistance at 20°C , max.	(Ω /km) ≤ 192
Test voltage (DC,1min)	v 1000
Operating voltage, max.	v 125
Capacitance unbalance	(pF/km) ≤ 1500

Capacitance at 800 Hz

nF/km 48

Transmission characteristics

Propagation delay (max. 100MHz)

(ns/100m) ≤ 535

Delay skew

(ns/100m) ≤ 20

Nominal propagation speed

ca. 67 %

Technical data

Cable type	Number of pairs (24AWG)	insulation diameter mm	Outer diameter mm	weight kg/km
Cat 5e F/UTP PE outdoor with messenger wire	4	0.9	5.4/2.8-5.7/2.8	43-45

Electrical performance

f (MHz)	Attenuation (dB/100 m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1	1.9	71	68	69.1	66.1	68	65	20
4	3.7	63	60	59.3	56.3	56	53	23
10	6.1	57	54	50.9	47.9	48	45	25
16	7.7	54	51	46.3	33.3	44	41	25
20	8.6	52	49	43.4	40.4	42	39	25
31.25	10.8	50	47	39.2	36.2	38	35	24
62.5	15.9	45	42	29.1	26.1	32	29	22
100	20.1	42	39	21.9	18.9	28	25	20
125	22.4	41	38	18.6	15.6	26	23	19
155.5	24.4	39	36	14.6	11.6	24	21	
175	25.9	38	35	12.1	9.1	23	20	
200	27.8	37	34	9.2	6.2	22	19	
250	29.6	36	33	6.4	3.4	20	17	



The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.